TRIP LEVER; VORMAX

PART NUMBERS:
7381458-200.xxx0A - ESTATE
7381457-200.xxx0A - OPTUM
7381459-200.xxx0A - ESTEEM

TO REMOVE TRIP LEVER:

- Turn off water supply; flush toilet
- Remove hair pin **FIGURE 1**
- Remove clevis pin; this frees the teeter bar from the trip lever arm **FIGURE 1**
- Loosen nut to remove from trip lever **FIGURE 2**
- Remove old trip lever
- Insert new trip lever and tighten nut

TO RECONNECT TRIP LEVER:

- Insert the trip lever arm in to the yoke **FIGURE 1**
- Push the clevis pin through the arm **FIGURE 1**
- Insert the hair pin **FIGURE 1**

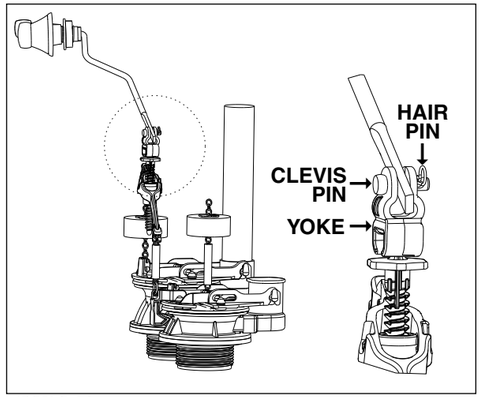

FIGURE 1

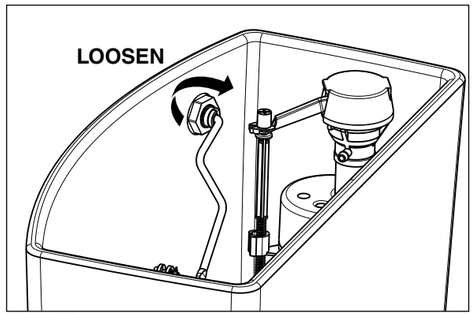

FIGURE 2

www.americanstandard-us.com/vormaxparts

Product names listed herein are trademarks of AS America Inc.
© AS America Inc. 2014

VORMAX™

TRIP LEVER; VORMAX

PART NUMBERS:
7381458-200.xxx0A - ESTATE
7381457-200.xxx0A - OPTUM
7381459-200.xxx0A - ESTEEM

COMPLETE BY ADJUSTING THE SETTINGS:

- Depress trip lever handle all the way **(A)**
- Adjust screw on the teeter bar **(B)** so rear frame **(C)** touches the frame stop **(D)**
- Return trip lever handle **(A)** to rest position.
- Make sure hook **(E)** is fully engaged under tab on valve body **(F)**, if not, slightly adjust screw to make sure hook is engaged.
- Turn water supply on; adjust water level to specified dimension on back of tank and flush 5 times to prime

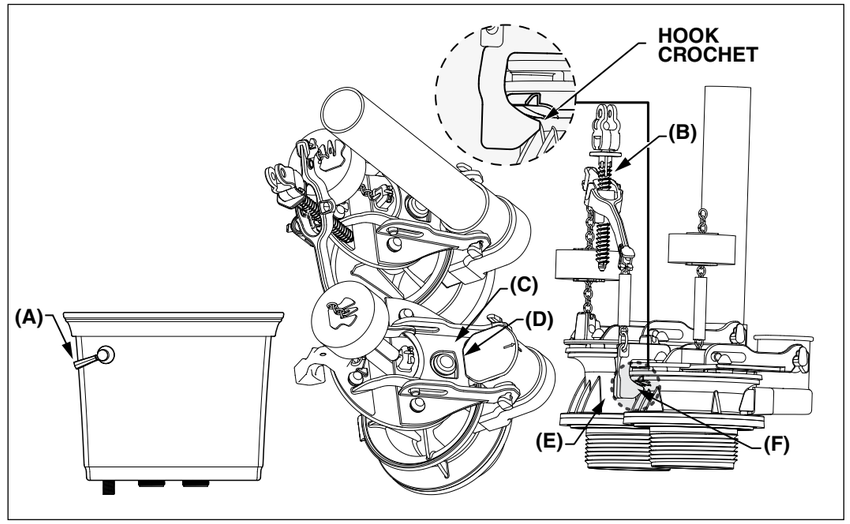

www.americanstandard-us.com/vormaxparts

Product names listed herein are trademarks of AS America Inc.
© AS America Inc. 2014

7302171-104